




CONNOR
SPORTS SURFACE
SOLUTIONS

FlashTrack™

Spike Resistant Athletic Surface

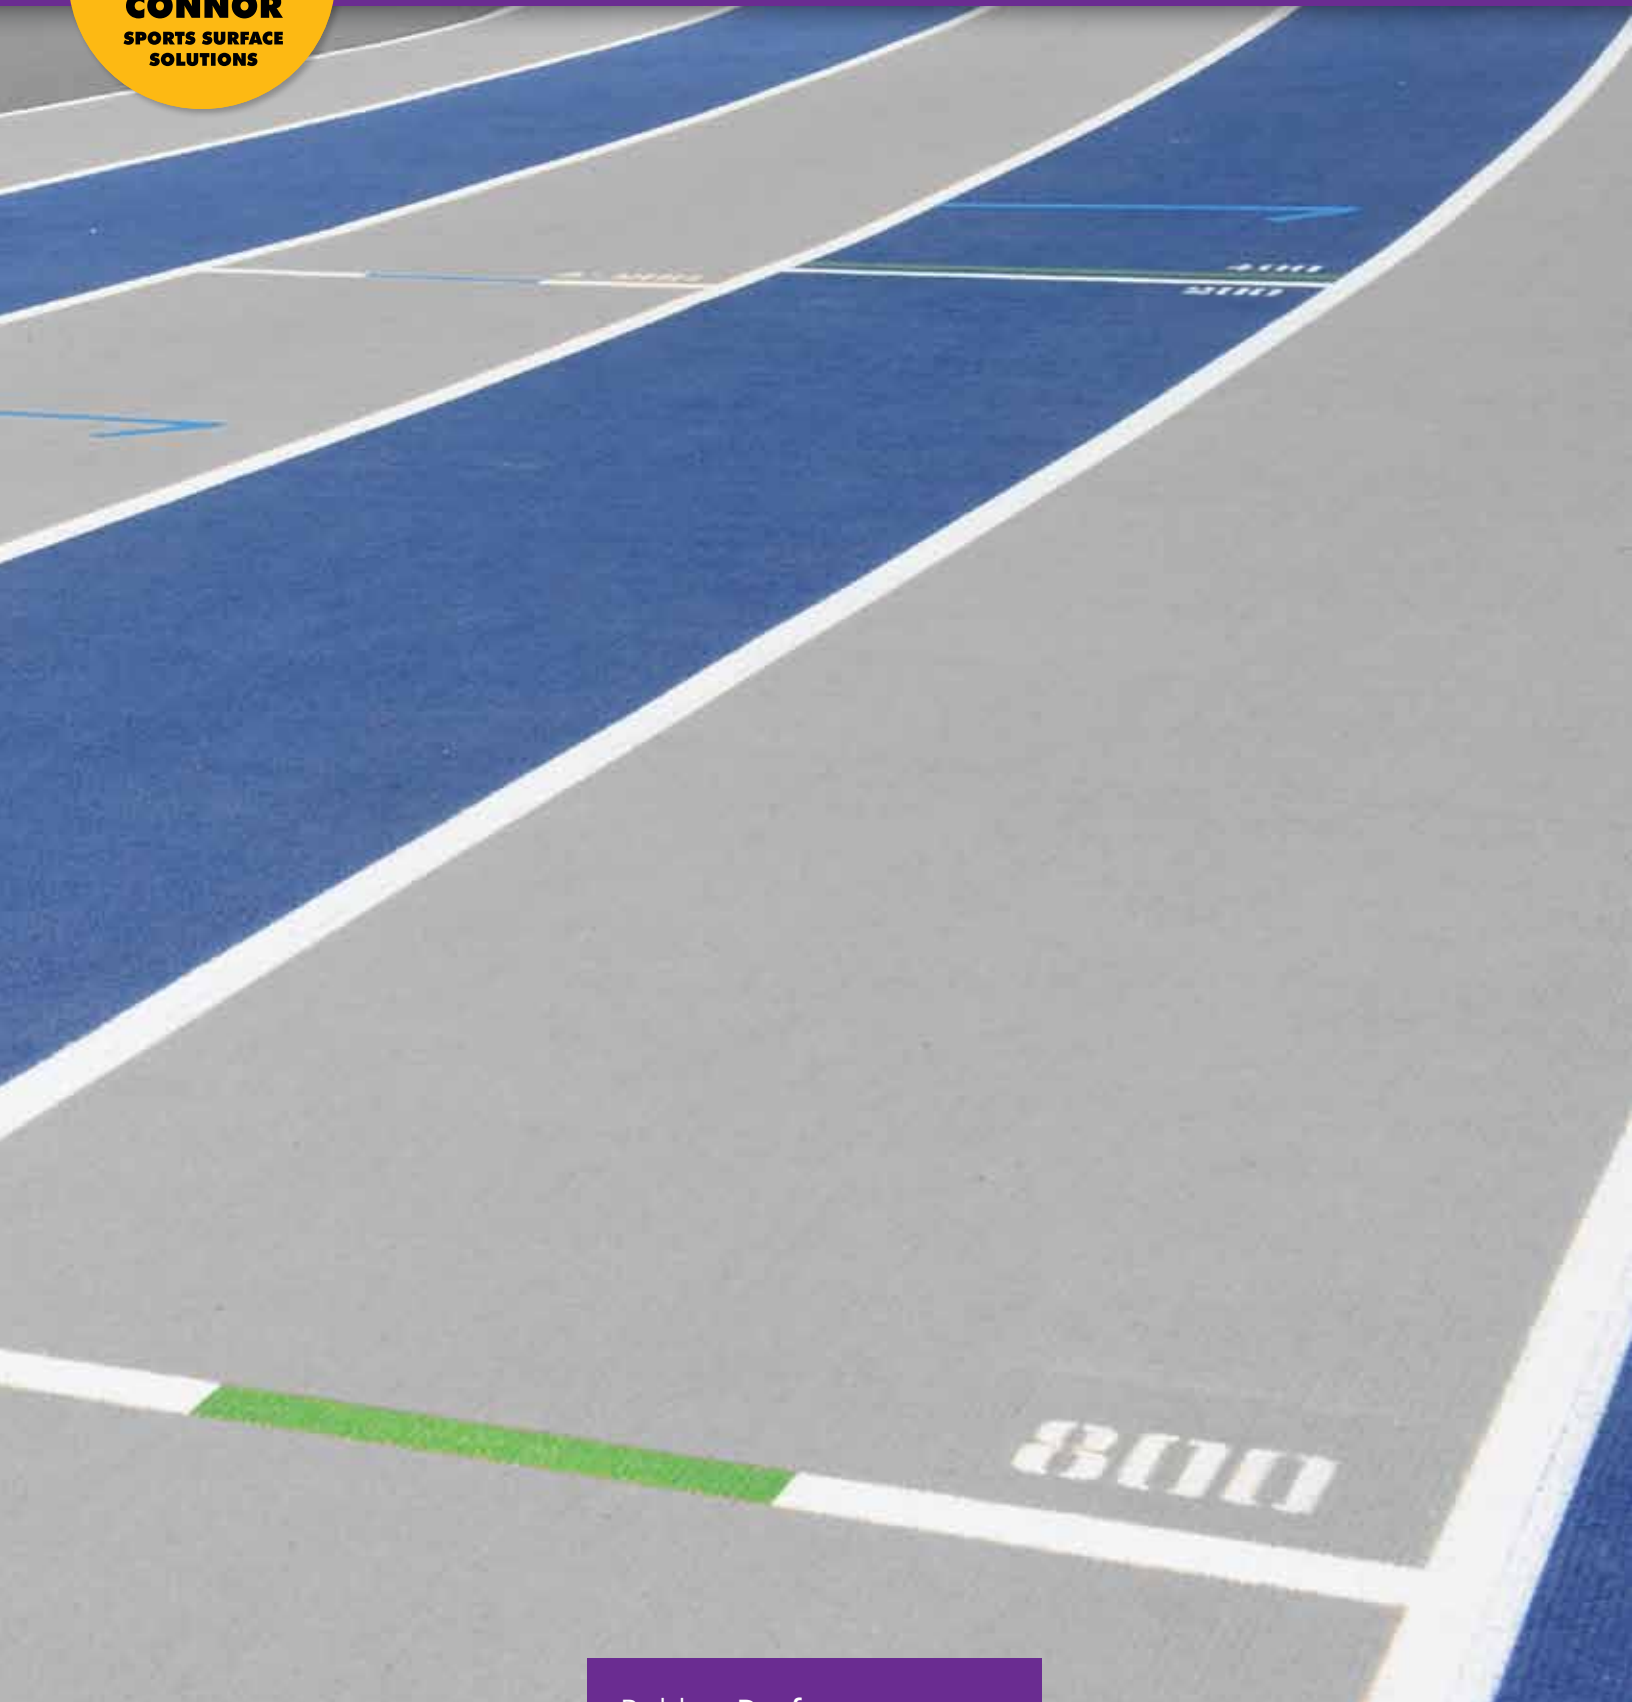

SportGrain™ Plus Series

ElastiPlus™ Series

Rubber Performance Series

Rubber Recycled Series

CourtCover™ Series

COMPETITIVE



- IAAF Certified
- Ideal track for training and competition
- Highest rated force reduction properties=safety for athletes

STRONG



- Spike Resistant vulcanized layers provide superior surface
- Improved & enhanced elongation properties
- UV treated for long-term wear & durability


VERSATILE



- Indoor and outdoor use
- 100% recyclable
- Free of colored fillers-vibrant visuals

IAAF Performance Specification	Certified
Hardness Shore A	55/40 (±5)
Resistance by Vertical Rebound	40%
Coefficient of Friction (wet)	≥ 0.6 wet
Resistance to Fungi	Non-Growth
Optical Density of Smoke	< 450, Class 1
Critical Radiant Flux	0.59 W/cm2 (Class I)
Static Load Limit (250 lbs)	≤ 0.010 in.
Abrasion Resistance Taber (H18 Wheel, 1000 cycles, 1000g Load)	≤ 1.8g (weight loss)
Force Reduction (0°C-50°)	40.00%
Modified Vertical Deformation	1.8mm
Tensile Properties Strength	≥ 1.25 Mpa
Elongation at break	≥ 200%
Spike resistance	Very Good (class I)
U.V. Resistance	Good (.84 Pass)
Heavy Metals	Non-Detected
Color Stability	Good
Chemical Resistance	Good
Recycled Rubber in Top Surface	NO
Polyurethane Adhesive (5 lbs.)	YES
Warranty	5 yrs.
Material weight per SQ. FT.	2.5 lbs.

FlashTrack™ Spike Resistant Athletic Surface

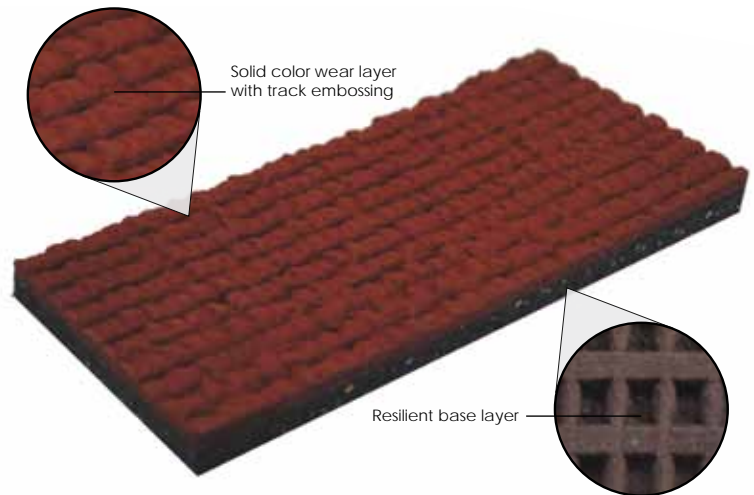

AVAILABLE COLOR OPTIONS*

Colors are representational only



FT-Red



FT-Green



FT-Yellow



FT-Wheat



FT-Light Gray



FT-Dark Gray



FT-Light Blue



FT-Dark Blue

*custom colors available

PRODUCT DIMENSIONS

Thickness: 6mm, 8mm, 10mm, 12mm, 13mm or 14mm
Type: Roll Maximum Width 4'6"



ROLL

800.283.9522
connorfloor.com

Connor Sport Court® affiliations include:



CONNOR
SPORTS SURFACE
SOLUTIONS